



skyacoustics

# DIRECT SUSPENDED SYSTEM

## DIRECT SUSPENDED

Direct suspended mounting systems use a series of rails and clips to mount to the panels, then the panels are suspended from cables or rod down from the above substrate.

### GUIDELINES:


- Typically a perimeter reveal is recommended for ceiling panels for a balanced look and can be concealed with a continuous wall moulding
- Any items located in the ceiling or wall must be independently supported (ie. Lights, diffusers, sprinklers). The panel are not structurally capable of supporting any weight.
- Speaker grilles are recommended to be visibly mounted at the face of the panel. Speaker function creates air movement and premature soiling will develop onto the panel.

### FEATURES:


- Concealed mounting system.
- Mechanical Z-clip method is mounted to secured suspension system by others.
- Z-clips are pre-fastened to panels.
- Panels slide into continuous ceiling tracks that are fastened to suspension system by others.
- Custom shaped, curved, and built-up panels are easily incorporated to the Direct Suspended Mounting system.

### MAINTENANCE


Contact Sky Acoustics for Direct Suspended maintenance instructions.

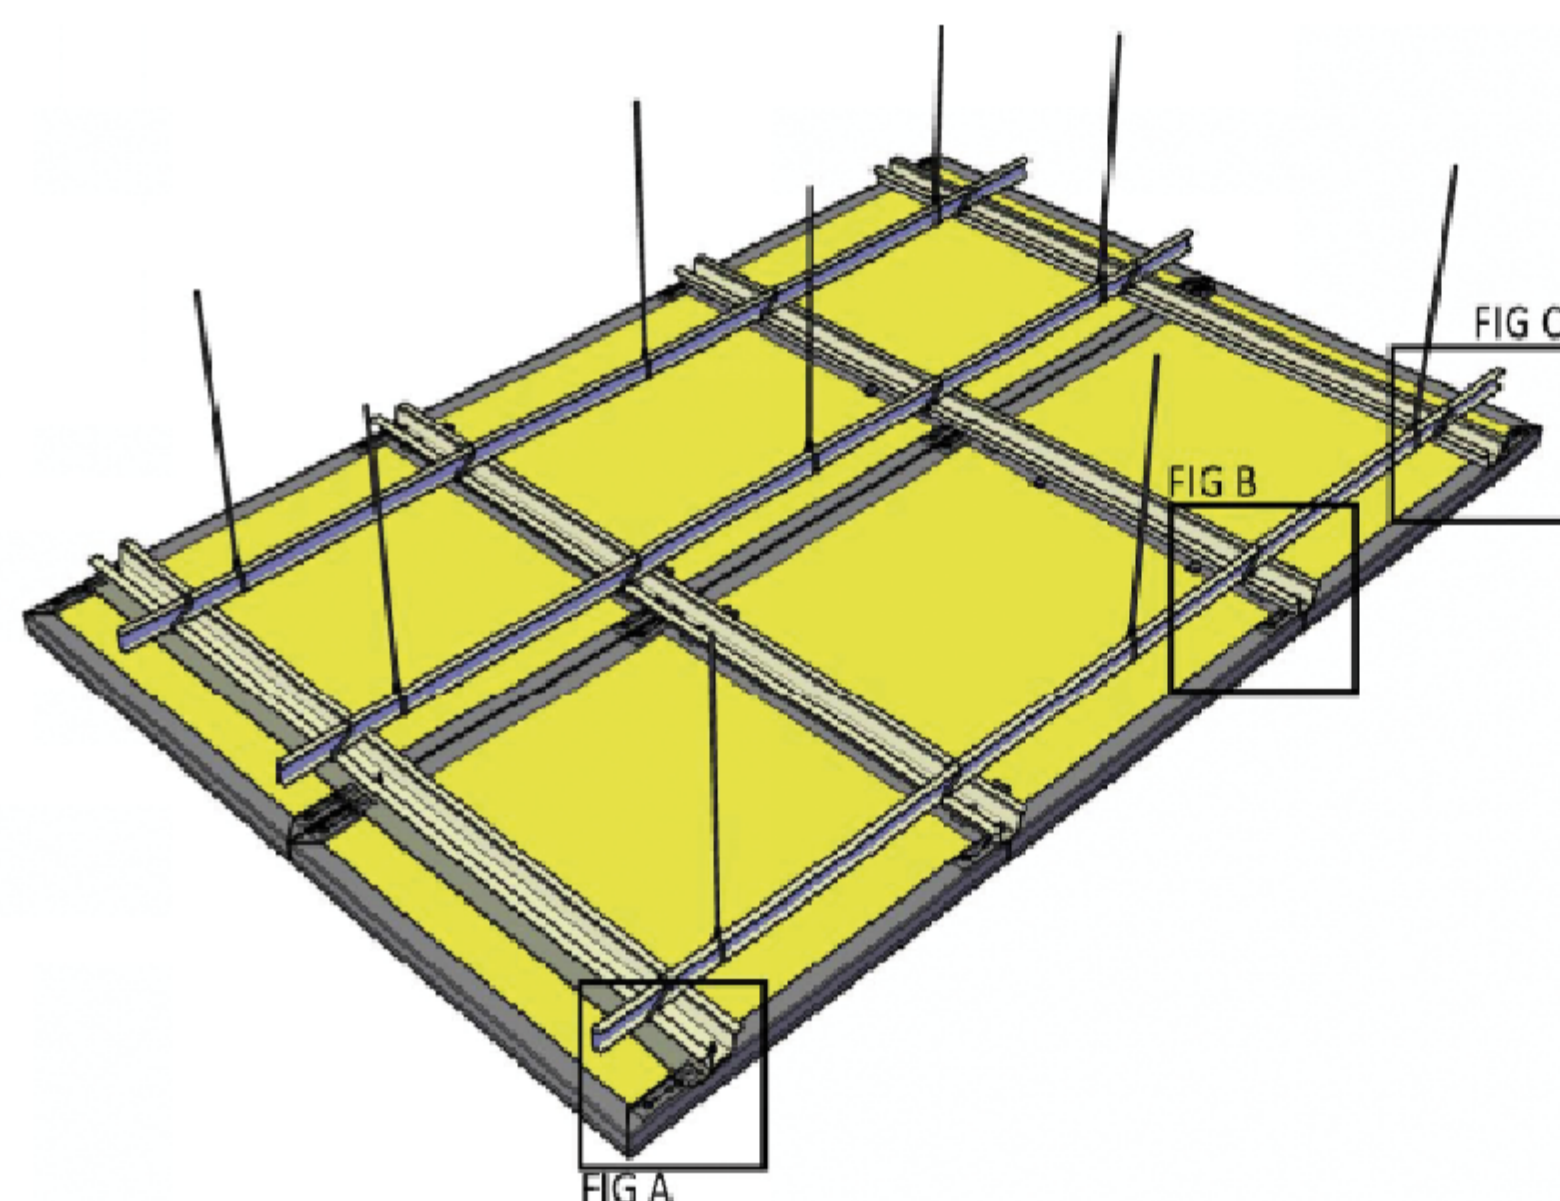


**FIG A: START PANEL**

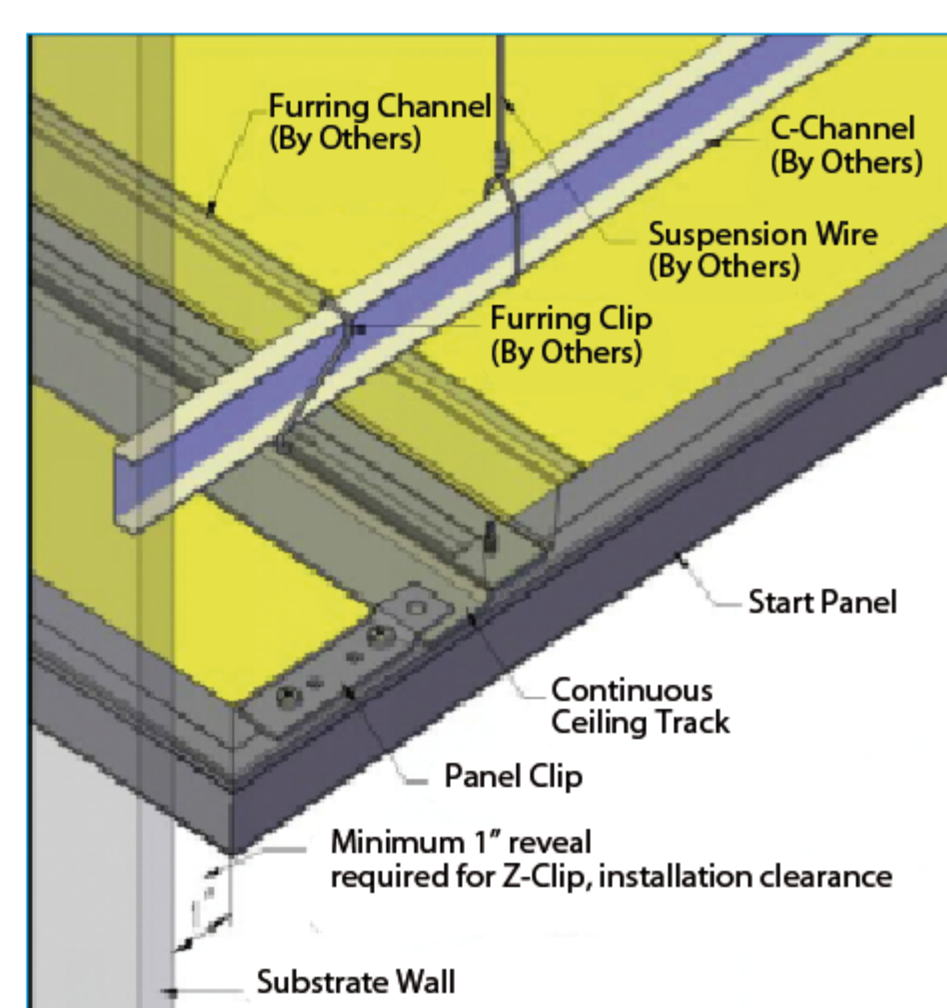

**FIG B: INTERMEDIATE**

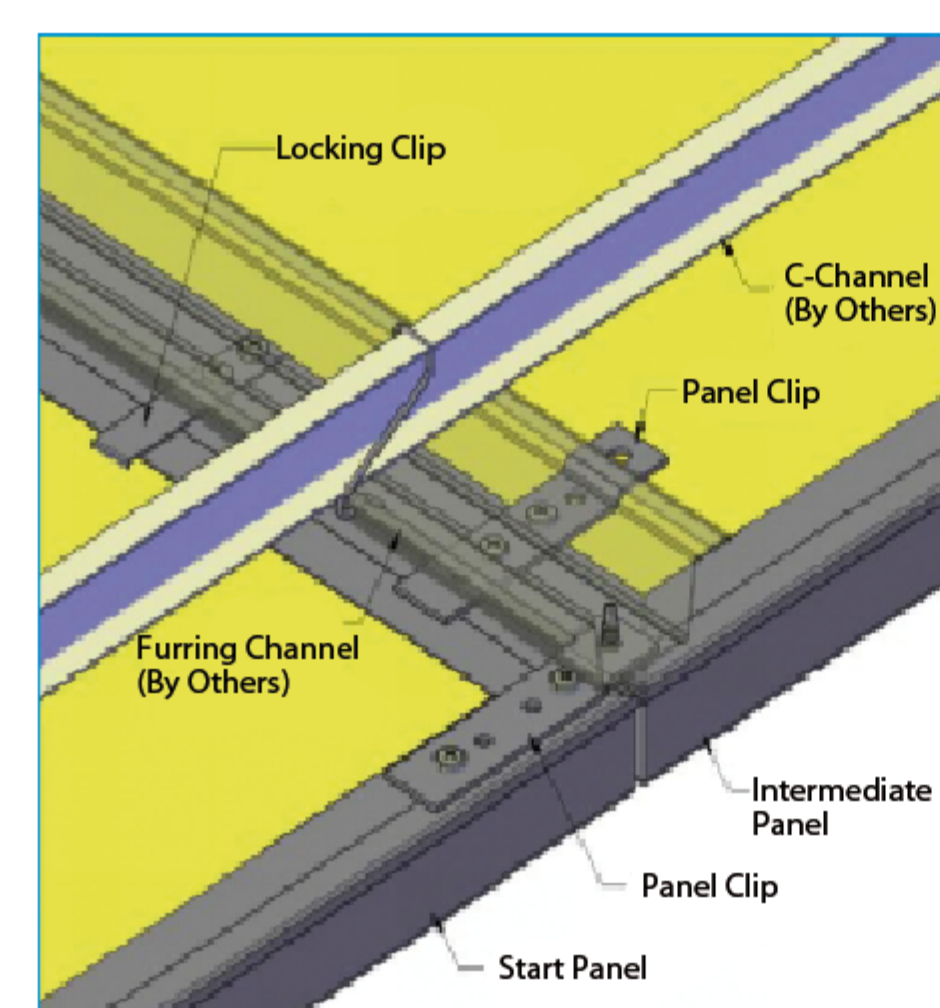

**FIG A: FINISH PANEL**

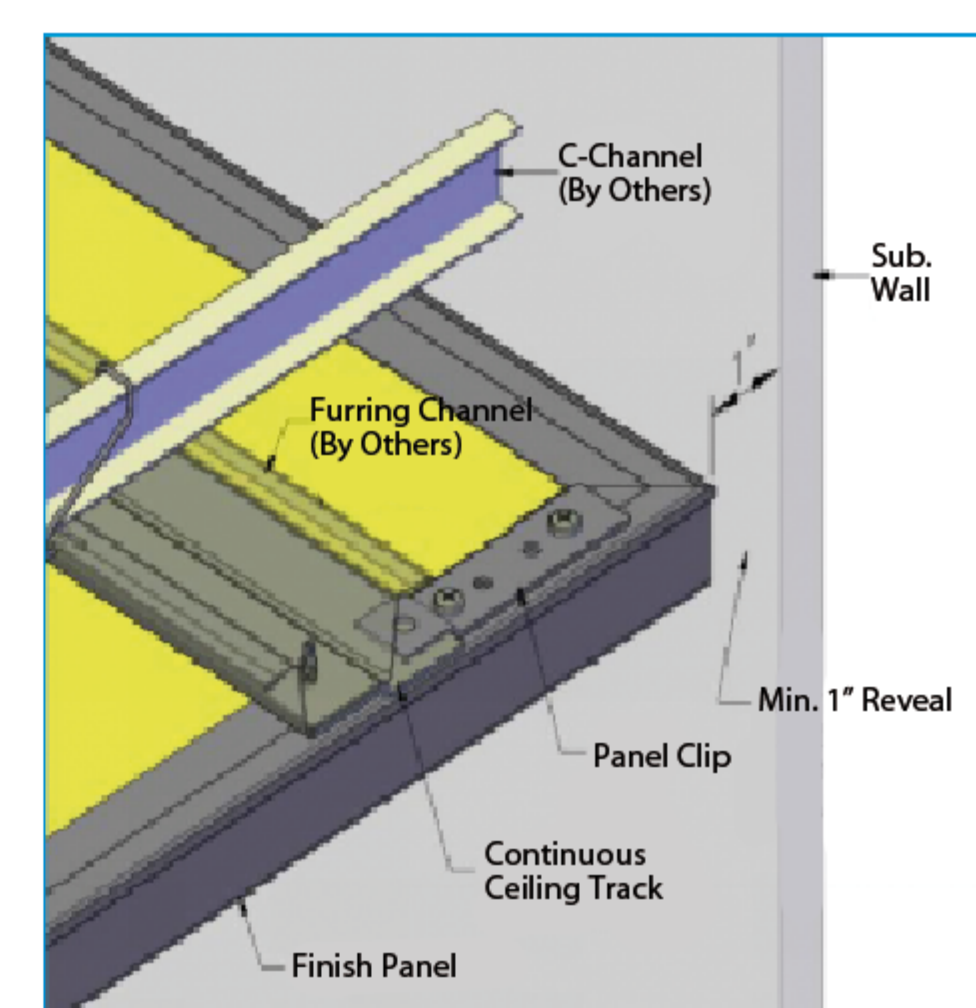

[www.sky-acoustics.com](http://www.sky-acoustics.com)

55 Bradwick Dr, Concord, ON L4K 1K5

Phone: (647) 477-2200

Email: [sales@sky-acoustics.com](mailto:sales@sky-acoustics.com)